

Instruction Manual FF01 Series Low Profile E-STOP Switches

We thank you for the recent purchase of our product. Please read the instructions carefully to ensure correct product use.

1. Part No.

Poles	Actuator Size	Actuator Legend	Part Number
SPST	25.0mm	Arrows	FF0116BACAEA01
SPST	30.0mm	Arrows	FF0116BBCAEA01
SPST	25.0mm	No Legend	FF0116BACEEA01
SPST	30.0mm	No Legend	FF0116BBCEEA01
DPST	25.0mm	Arrows	FF0126BACAEA01
DPST	30.0mm	Arrows	FF0126BBCAEA01
DPST	25.0mm	No Legend	FF0126BACEEA01
DPST	30.0mm	No Legend	FF0126BBCEEA01

2. Safety Precautions

- Be sure to read the instruction manual and catalog before installing, wiring, operation, maintenance, or inspection the product.
- Confirm power is off before installation, wiring, maintenance, or inspections. Failure to do so may cause electric shock, fire, or malfunctions.
- When the product is installed on other equipment, be sure usage is in compliance with all applicable standards and regulations in the country or region, as required for the system, machine, or facility.

3. Caution in Use

[Before using the product]

- Do not use a power supply that exceeds the rated voltage or current indicated in the specifications. Using a power supply that exceeds ratings may cause overheating or fire.
- Use wires of appropriate rating. Use of improper wires may cause overheating and fire.
- Follow recommended "Mounting Panel Cutout" dimensions and installation instruction, or switch may be fixed loose and not operate properly.
- Remove dirt and dust from the switch mounting surface of the panel before installation.
- Do not disassemble the product as it may cause electric shock, fire, or malfunctions.
- Operate the product by hand only. Do not operate using foot, tool, or other objects.
- Chattering and bouncing
Bouncing may occur during a reset operation (pull or turn to reset). Chattering may occur if the switch-mounted equipment is subjected to shock or vibration. Take appropriate measures to prevent chattering and bouncing on the equipment side.
- Safeguard against excessive shock or vibration, such as dropping. Excessive shock and vibration may result in deformation, damage, degraded performance, or failure.

【Soldering】

- After inserting the lead wire into the terminal hole, use a soldering iron to ensure a secure connection.
Incomplete soldering may cause overheating in overheating and fire during use.
- Note that if soldering is performed while the terminal is facing up, the flux may enter the interior of the switch. Perform soldering carefully.
- The solder resistant temperature is 390°C. Complete the soldering within four seconds.

【Usage Environment】


- The product is designed for indoor use.
- Do not install in locations subject to frequent splashing water.
- If the product becomes wet, wipe off with a dry cloth. Using a switch exposed to water may result in water entering inside; if the water freezes inside the switch, it may not function properly.
- When using the product in environments subject to accumulations of dust and dirt, remove such accumulations from the area around the switch before use. Accumulated dust and dirt, may affect switch function.

【Routine Care】

- Use a dry cloth to wipe dirt from the actuator. If the actuator is very dirty, wipe with a cloth dampened with a small amount of neutral detergent, then wipe dry. (Actuator material: Fiber-reinforced PBT)

4. Installing the Switch

- (1) Remove the round nut from the switch main body.
- (2) With the notch in the O-ring aligned with the anti-rotation tab on the switch main body, insert the switch body into panel. In this step, align the anti-rotation tab on the switch main body with the anti-rotation keyway on the panel.
- (3) Using the fixing nut wrench (AT119), tighten the round nut from the back side of the panel to the recommended tightening torque of 785 mN·m.

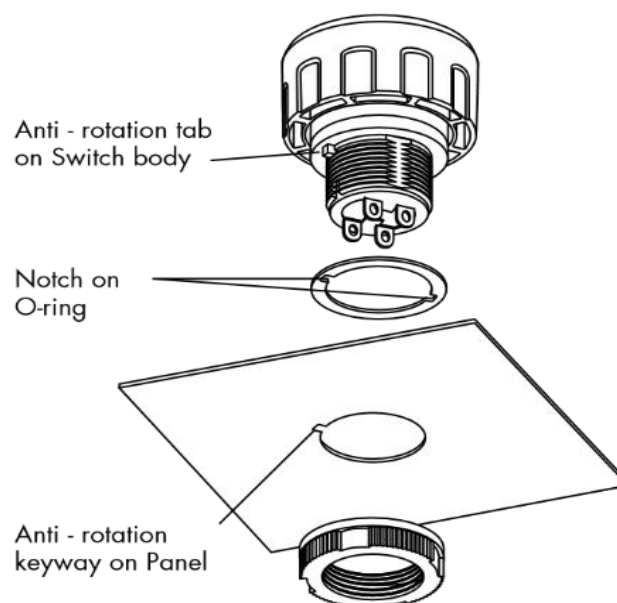

5. General Specifications

Test specification	UL508/EN60947-5-1/EN60947-5-5
Rated Operating Voltage (Ue)	Resistive Load (DC-12) 24V DC 0.5A
Rated Operating Current	※UL, TÜV certified rating
Rated Insulation Voltage (Ui)	36V DC
Rated Impulse Withstand Voltage	2.5kV
Sealing	Front panel : IP65 (IEC 60529)
Pollution Degree	3
Short-circuit Protection Device	g G10A
Conditional Short-circuit Current	1000A
Ambient Operating Temperature	-25 to +60°C (no freezing)
Ambient Storage Temperature	-45 to +80°C (no freezing)
Operating Force	Push to lock: 10.8N Pull to reset: 8.5N Turn to reset: 0.13 N·m
Minimum Force to achieve direct opening action of all break contacts	15N
Minimum travel including travel beyond the minimum travel position	3.0mm
Maximum travel of actuator	4.5mm
Contact Resistance	50 mΩ maximum (initial value)
Insulation Resistance	100 MΩ minimum (500V DC megger)
Overvoltage Category	II
Operation Frequency	600 operations/hour
Shock Resistance	Durability:1,000 m/s ² Malfunction:150 m/s ²
Vibration Resistance	Durability:10 to 500 Hz half amplitude:0.35mm,acceleration:50m/s ² Malfunction: 10 to 500 Hz half amplitude:0.35mm,acceleration:50m/s ²
Electrical Life/ Mechanical Life	Electrical Life/ Mechanical Life :100,000 operations Minimum (resistive load),6050 times Minimum (inductive load (DC-13))
Recommended fixing nut mounting torque	785mN·m
Soldering	Soldering:390°C or lower within 4 seconds
Effective Panel Thickness	Effective Panel Thickness 0.8 to 4.5mm (Effective Panel Thickness Range with a nameplate or switch guard 0.5 to 3.0mm)

* UL, TÜV certified rating

•UL/ TÜV certified rating: 24 V DC, 0.5 A (DC-13)

Minimum applicable load (reference value) : 5 V DC 1mA


(Usage conditions and load types may affect the allowable operating range.)

6. Mounting panel Cutout

Effective Panel Thickness 0.8 to 4.5 mm

(The thickness is 0.5 to 3.0 mm when the accessory (optional) nameplate and switch guard are installed)

Processing should be in accordance with the installation hole drawing to allow the rotation stop function of the main switch unit to function properly.



7. Inquiries

Americas

NKK SWITCHES OF AMERICA INC.

7850 E. Gelding Drive, Scottsdale, AZ 85260 U.S.A.

Tel: 1 480 991 0942 Fax: 1 480 998 1435

www.nkkswitches.com

Asia

NKK SWITCHES HONG KONG CO., LTD.

Rm. 601, Fook Yip Building, 53-57 Kwai Fung Crescent,
Kwai Chung, N.T., Hong Kong.

Tel.: (852)2366-6634 Fax.: (852)2366-6803

www.nkkswitches.com.hk

E-mail: info@nkkswitches.com.hk

Europe

NKK SWITCHES CO., LTD.

European Liaison Office

Mergenthalerallee 10-12, 65760 Eschborn, Germany

Tel: 49 61 96 400 189 (English, German)

www.nkkswitches.eu / www.nkkswitches.de