

Change Notice

UB2 Series

Changes for Super Bright Blue LEDs in UB2 Series Pushbuttons & Indicators

Type of Change:

- ☒ Engineering ☐ Part Number
☒ Product ☒ Appearance

The Super Bright Blue LEDs for UB2 Series pushbutton switches and indicators will be changing. Both standard and custom pushbuttons and indicators are included in the revision. The change will effect electrical specifications, which are compared below. It will also effect the LED terminal dimensions and terminal plating, displayed on page 2. Part numbers for effected standard switches and indicators are shown on page 3.




UB2 Series with Super Bright Blue LED Have Changes

CHANGES TO SPECIFICATIONS FOR SUPER BRIGHT BLUE LED

The electrical specifications shown are determined at a basic temperature of 25°C. Polarity marks are on bottom of switch. The LED is an integral part of the switch and not available separately. 		Super Bright LEDs are Electrostatic Sensitive 	
		Before Change 6G	After Change 6G
Maximum Forward Current	I_{FM}	30mA	30mA
Typical Forward Current	I_F	20mA	20mA
Forward Voltage	V_F	3.6V	2.9V
Maximum Reverse Voltage	V_{RM}	5V	5V
Current Reduction Rate Above 25°C	ΔI_F	0.50mA/°C	0.33mA/°C
Ambient Temperature Range		-25°C ~ +50°C	-25°C ~ +50°C

Notes

- The LED circuit is isolated and requires an external power source.
- For best results and safe use of the LEDs, the supply voltage should be more than the LED forward voltage. In addition, an appropriately valued ballast resistor should be used. Without the ballast resistor, the LED will be damaged or destroyed. The resistor value can be calculated by using the formula shown here.
- Contact information is below if more details are needed.



$$R = \frac{E - V_F}{I_F}$$

Where: R = Resistor Value (Ohms)
 E = Source Voltage (V)
 V_F = Forward Voltage (V)
 I_F = Forward Current (A)

Effective Date

Changes for UB2 Series Illuminated Pushbuttons and Indicators with Super Bright Blue LEDs are effective November 2022.

NKK SWITCHES HONG KONG CO., LTD.

Rm. 601, Fook Yip Building, 53-57 Kwai Fung Crescent, Kwai Chung, N.T., Hong Kong.
 Tel.: (852)2366-6634 Fax.: (852)2366-6803 www.nkkswitches.com.hk E-mail: info@nkkswitches.com.hk


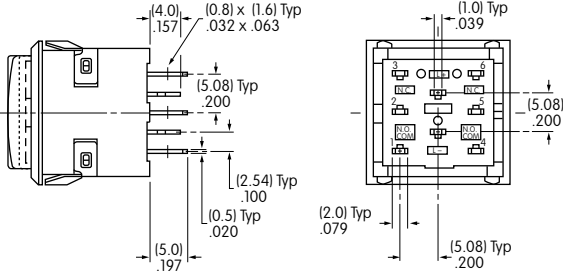

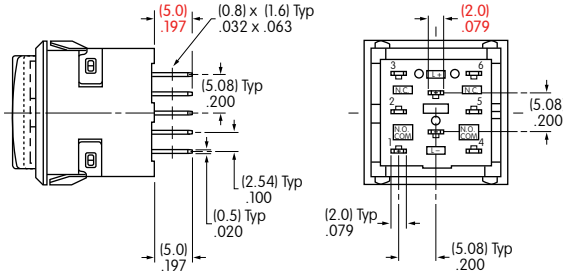

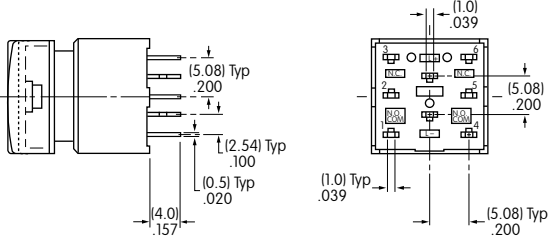

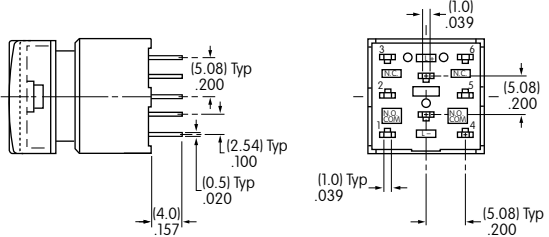
NKK SWITCHES CHINA CO., LTD.

Rm. 702, Center Tower, Huaning Plaza, 300 Xuanhua Rd., Changning, Shanghai China
 Tel.: (86)21-62496574 Fax.: (86)21-62483375 www.nkkswitches.com.cn E-mail: info@nkkswitches.com.cn

Change Notice

UB2 Series

Changes for Super Bright Blue LEDs in UB2 Series Pushbuttons & Indicators

CHANGES TO TERMINALS & TERMINAL PLATING		
Model	Before Change	After Change
Snap-in Mount with Solder Lug Terminals Code 01	  	  
PC Mount with Straight PC Terminals Code 03	  	  
Terminal Plating	Tin	Silver

Notes Illustrations represent UB2 double pole illuminated pushbuttons. Single poles switches do not have terminals 4, 5 and 6. UB2 indicators do not have terminals 1 through 6. Dimensions are in metric/inch.

NKK SWITCHES HONG KONG CO., LTD.

Rm. 601, Fook Yip Building, 53-57 Kwai Fung Crescent, Kwai Chung, N.T., Hong Kong.
Tel.: (852)2366-6634 Fax.: (852)2366-6803 www.nkkswitches.com.hk E-mail: info@nkkswitches.com.hk

NKK SWITCHES CHINA CO., LTD.

Rm. 702, Center Tower, Huaning Plaza, 300 Xuanhua Rd., Changning, Shanghai China
Tel.: (86)21-62496574 Fax.: (86)21-62483375 www.nkkswitches.com.cn E-mail: info@nkkswitches.com.cn

Change Notice

UB2 Series

Changes for Super Bright Blue LEDs in UB2 Series Pushbuttons & Indicators

EFFECTED STANDARD PART NUMBERS FOR SWITCHES		
UB215KKG016G	UB216KKW016G-2B	UB225SKG036G-3JB
UB215KKG016G-1JB	UB216KKW016G-3JB	UB225SKW036G
UB215KKG016G-2B	UB216SKG036G	UB225SKW036G-1JB
UB215KKG016G-3JB	UB216SKG036G-1JB	UB225SKW036G-2B
UB215KKW016G	UB216SKG036G-2B	UB225SKW036G-3JB
UB215KKW016G-1JB	UB216SKG036G-3JB	UB226KKG016G
UB215KKW016G-2B	UB216SKW036G	UB226KKG016G-1JB
UB215KKW016G-3JB	UB216SKW036G-1JB	UB226KKG016G-2B
UB215SKG036G	UB216SKW036G-2B	UB226KKG016G-3JB
UB215SKG036G-1JB	UB216SKW036G-3JB	UB226KKW016G
UB215SKG036G-2B	UB225KKG016G	UB226KKW016G-1JB
UB215SKG036G-3JB	UB225KKG016G-1JB	UB226KKW016G-2B
UB215SKW036G	UB225KKG016G-2B	UB226KKW016G-3JB
UB215SKW036G-1JB	UB225KKG016G-3JB	UB226SKG036G
UB215SKW036G-2B	UB225KKW016G	UB226SKG036G-1JB
UB215SKW036G-3JB	UB225KKW016G-1JB	UB226SKG036G-2B
UB216KKG016G	UB225KKW016G-2B	UB226SKG036G-3JB
UB216KKG016G-1JB	UB225KKW016G-3JB	UB226SKW036G
UB216KKG016G-2B	UB225SKG036G	UB226SKW036G-1JB
UB216KKG016G-3JB	UB225SKG036G-1JB	UB226SKW036G-2B
UB216KKW016G	UB225SKG036G-2B	UB226SKW036G-3JB
UB216KKW016G-1JB	—	—
EFFECTED STANDARD PART NUMBERS FOR INDICATORS		
UB201KW036G	UB201KW036G-3JB	UB204KW036G-2B
UB201KW036G-1JB	UB204KW036G	UB204KW036G-3JB
UB201KW036G-2B	UB204KW036G-1JB	—

NKK SWITCHES HONG KONG CO., LTD.

Rm. 601, Fook Yip Building, 53-57 Kwai Fung Crescent, Kwai Chung, N.T., Hong Kong.
Tel.: (852)2366-6634 Fax.: (852)2366-6803 www.nkkswitches.com.hk E-mail: info@nkkswitches.com.hk

NKK SWITCHES CHINA CO., LTD.

Rm. 702, Center Tower, Huaning Plaza, 300 Xuanhua Rd., Changning, Shanghai China
Tel.: (86)21-62496574 Fax.: (86)21-62483375 www.nkkswitches.com.cn E-mail: info@nkkswitches.com.cn